

Productive Decoating of PVD Coatings

Platit-CT decoats in less than 30 minutes



PLATIT®
Advanced Coating Systems
SWISS  QUALITY

PLATIT AG
Eichholz St. 9 – P.O.Box 151
CH-2545 Selzach / SO, Switzerland
Phone: +41 (32) 544 62 00
Fax: +41 (32) 544 62 20
eMail: info@platit.com
www.platit.com

Masthead

Publisher: Carl Hanser Verlag GmbH & Co. KG, Kolbergerstr. 22, 81679 Munich; Printer: alpha-teamDRUCK, Haager Str. 9, 8161 Munich
© Carl Hanser Verlag, Munich. All rights reserved, including reprinting, photographic or electronic reproduction as well as translation.

Special reprint



Platit-CT decoats in less than 30 minutes

Productive Decoating of PVD Coatings

The decoating of cutting tools for regrinding is an important precondition for their recoating with high quality [1]. The methods known today are slow. This article presents a new, fast decoating process and the decoating system developed for this purpose.



1 The Platit-CT decoating system

BY CHRISTIAN BÜCHEL, GUNNAR LAHTZ, BIRGIT WITTEL AND TIBOR CSELLE

→ In May 2014, the importance, requirements and latest technologies currently available were summarized in detail at a special workshop [2]. As a result, this article can be spared a long introduction and concentrate fully on the economically crucial question concerning the productivity of decoating.

›Productive decoating‹ actually sounds paradoxical. Decoating does not produce any new product but removes

an old, used coating so that the new coating can bond well on the reground tool and achieve high performance. Hence, productive decoating primarily means speed. It must not hinder the production of the new coating.

Decoating processes and systems are offered by very few companies on the market. This knowhow is a closely guarded secret and is used predominantly only in their own job coating centers. Very little data is known about the individual processes. It is a known fact, however, that decoating times are long. They require several hours or even days ([3], page 38).

Platit-CT decoating system and process cycle

The new wet chemical decoating system (Figure 1) from Platit in Selzach/Switzerland works with a free programmable, pulsed voltage supply that is controlled by a simple computer. The tools are held in fixtures (Figure 2). The unit can be built up in 2 configurations:

- Configuration A: For carbide tools for most nitride coatings
- Configuration B: For HSS-tools for chromium based coatings

The stability of the chemical baths is between one and four month depending on frequency of use. Constant new preparation of the chemical baths is not necessary, which reduces the variable costs of the decoating.


The process cycle is shown in Figure 3. In stage 1, pulsed decoating is performed in bath A (Figure 2). The decoating duration is in minutes. Any thin TiN bonding layer that might be present can be removed afterwards in a conventional decoating module, under protecting voltage ([3]), in peroxide solutions during stage 2 within approximately 15 minutes. Thus, the entire decoating time lasts considerably less than 30 minutes.

i MANUFACTURER

Platit AG
CH-2545 Selzach
Phone +41 32 5446200
www.platit.com



2 Elements of the Platit-CT decoating system

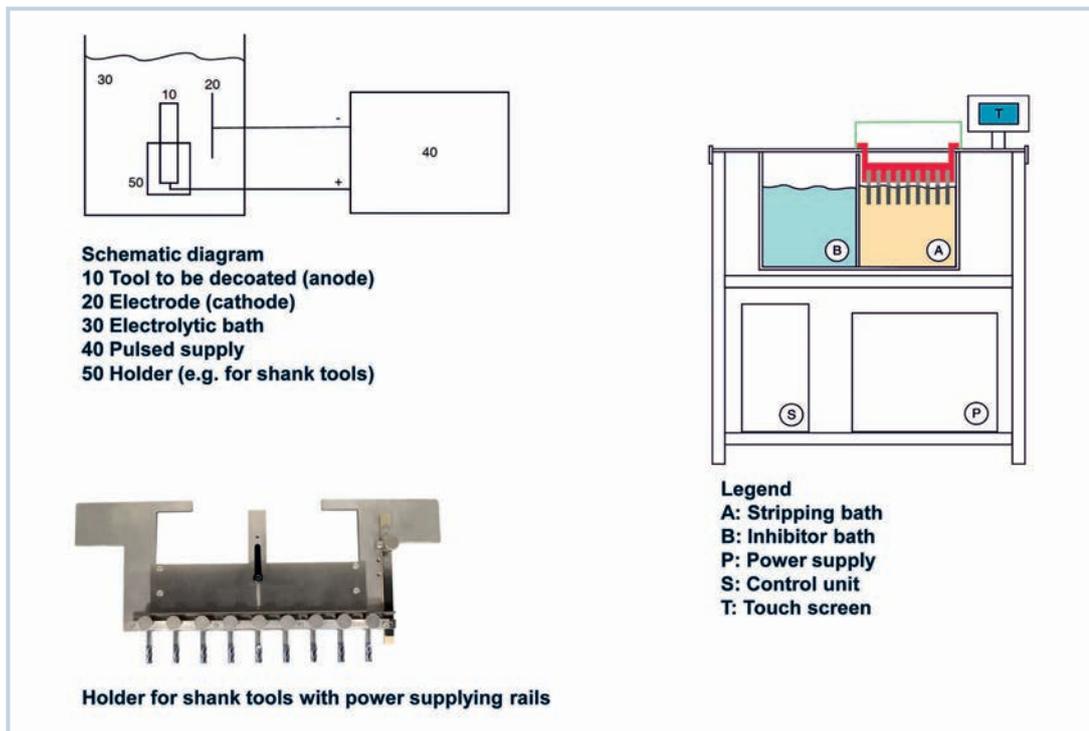

The end of the decoating process can be detected by the built-in electronics that simplifies the daily practice of the operator greatly. This fast decoating also increases flexibility through the reduction of the decoating time. Its flexibility is of huge importance for small regrinders, they are incessantly struggling with large job coating centers. The decoating process during the reprocessing of the tools no longer takes most of the time (collecting-decoating-regrinding-re-coating-delivering).

The decoating recipes and decoated tools

The decoating recipes are the key to the process, of course. They include the following knowhow:


- the recommended special holders for shaft tools and hobs,
- which chemistry (alkaline or acidic) should be used for the different substrate materials,
- the program for the electronic control unit of the wet chemical processes (voltage, current, frequency, duty cycle, operating time),
- assessment of the surface quality and any further treatment that might be recommended.

The recipes can be divided into 2 groups (Figure 3):


- One recipe works for carbide tools regardless of the type of nitride coating.
- One recipe works for HSS-tools with chromium based coatings.

Figure 3 also shows carbide tools before and after the new Platit-CT decoating process. For the user it is tremendously

important that the tools do not have any cobalt leaching, thanks to the TiN bonding layer and the two-stage decoating, and that the tool shafts cannot be attacked by the chemicals, because they stay above the liquid surface. They withstand the decoating without any dimensional changes.

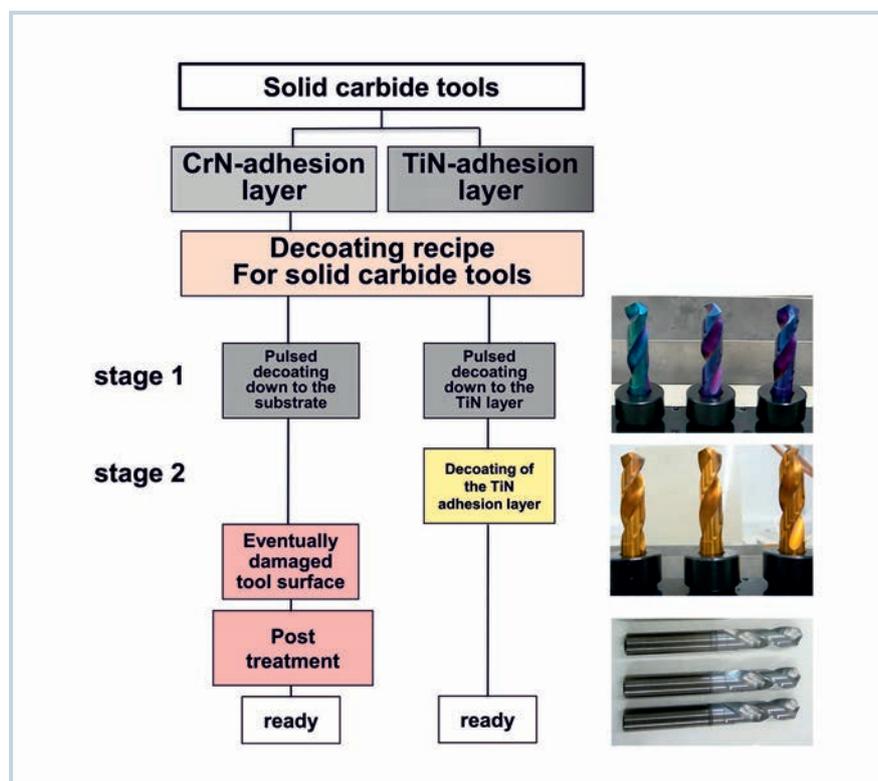

3 Process cycle of the CT decoating

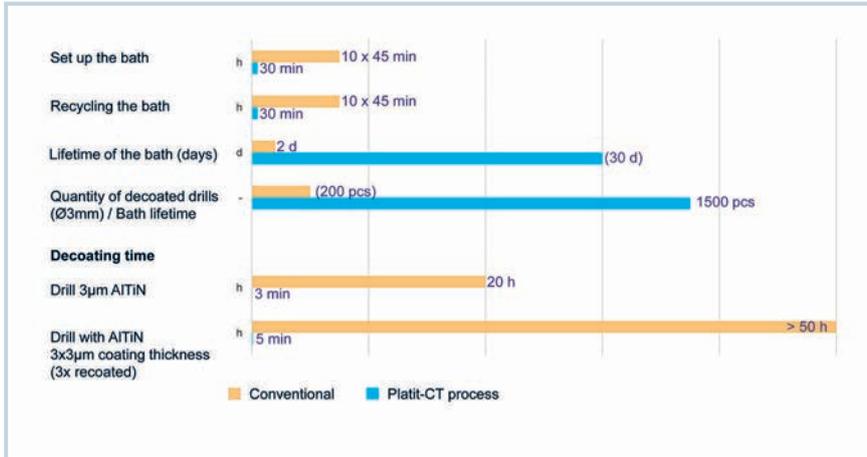

4 Comparison of bath preparation, lifetime and decoating times of solid carbide shank tools with conventional and CT process

The productivity increase

As mentioned in the introduction, the productivity, the short execution time of the decoating, is important so that the re-coating of the tools does not suffer any delay. Figure 4 compares, by way of example, the bath preparation, lifetime and decoating times of the conventional and Platit-CT processes for carbide shank tools.

REFERENCES

- 1 Prochazka, J., Büchel, C. und Cselle, T.: Entschichtung gehört zum Beschichten. In: Werkzeugtechnik 11/2009, p. 40–44
- 2 Entschichtung von PVD-Schichten und Hybridschichten. EFDS Workshop, Dresden 2014
- 3 Platit – Compendium 2014. 53rd Edition, Platit AG, Selzach 2014
- 4 Process for decoating ceramic hard coatings of steel and carbide substrates. Pat. application PCT/EP2014/055376, European Patent Office, Munich 2014

Christian Büchel is Product Manager at Platit in Selzach/Switzerland

Gunnar Lahtz is Project Engineer at Platit

Birgit Wittel is a former Project Manager at Platit

Dr. Tibor Cselle is the Senior CEO of Platit info@platit.com

